

ADDENDUM NO. 1
TO THE
DRAWINGS AND SPECIFICATIONS
FOR THE

KINSER PIKE SIDEWALK (GOURLEY PIKE TO 45/46 BYPASS)
PW 09-23

ISSUED FROM: CITY HALL AT THE SHOWERS BUILDING
Post Office Box 100
401 North Morton Street
Bloomington, Indiana 47404


ISSUE DATE: October 6, 2009

Bid DATE: October 8, 2009

This Addendum No.1, to the drawings and specifications shall supplement, amend and become a part of the bidding documents, plans, and specifications. All bids and construction contracts shall be based on these modifications to the original contract documents.

ITEM No. 1:

Shall include changes and modifications as depicted and listed on the attached addendum sheets provided by Bledsoe, Riggert and Guerrettaz, with regard but not limited to the inclusion of a handrail and additional inlet with stormwater modifications.

	 CERTIFIED BY: _____ JUSTIN D. WYKOFF CITY OF BLOOMINGTON STATE OF INDIANA
--	---

Acknowledge receipt of the addendum by submitting a signed copy with your bid proposal.

RECEIVED BY: CONTRACTOR (FIRM AND ADDRESS)

SIGNATURE: _____

DATE: _____

PRINTED NAME: _____

TITLE: _____

BRG Project No. 6612

October 5, 2009

Kinser Pike Sidewalk Improvements at State Road 45/46 Bypass

Addendum No. 1 – Revised Plan Items and Alternate No. 1 Addition

Addendum No. 1


Drawing Items:

1. Contractor to revise plan note number 13 under Improvement Plan Notes on Sheet C201 to read, "PAVEMENT MARKING TRAFFIC PAINT - 6" WIDE, WHITE CROSS WALK PER INDOT SECTION 808.07."
2. Contractor to add storm structures and piping to plan as indicated on sheet ADD1-C1.
3. Contractor to provide alternate bid number 1. This alternate bid shall consist of the work to core drill concrete integral wall and walk, install hand railing along the entire length of the concrete integral wall and walk section, and seal all holes as indicated on sheet ADD1-C2.

Specification Items:

1. Remove reference sheet C502 under general provisions and refer to the plan set sheet C502 for integral wall and walk details.

File - Project No. 6612

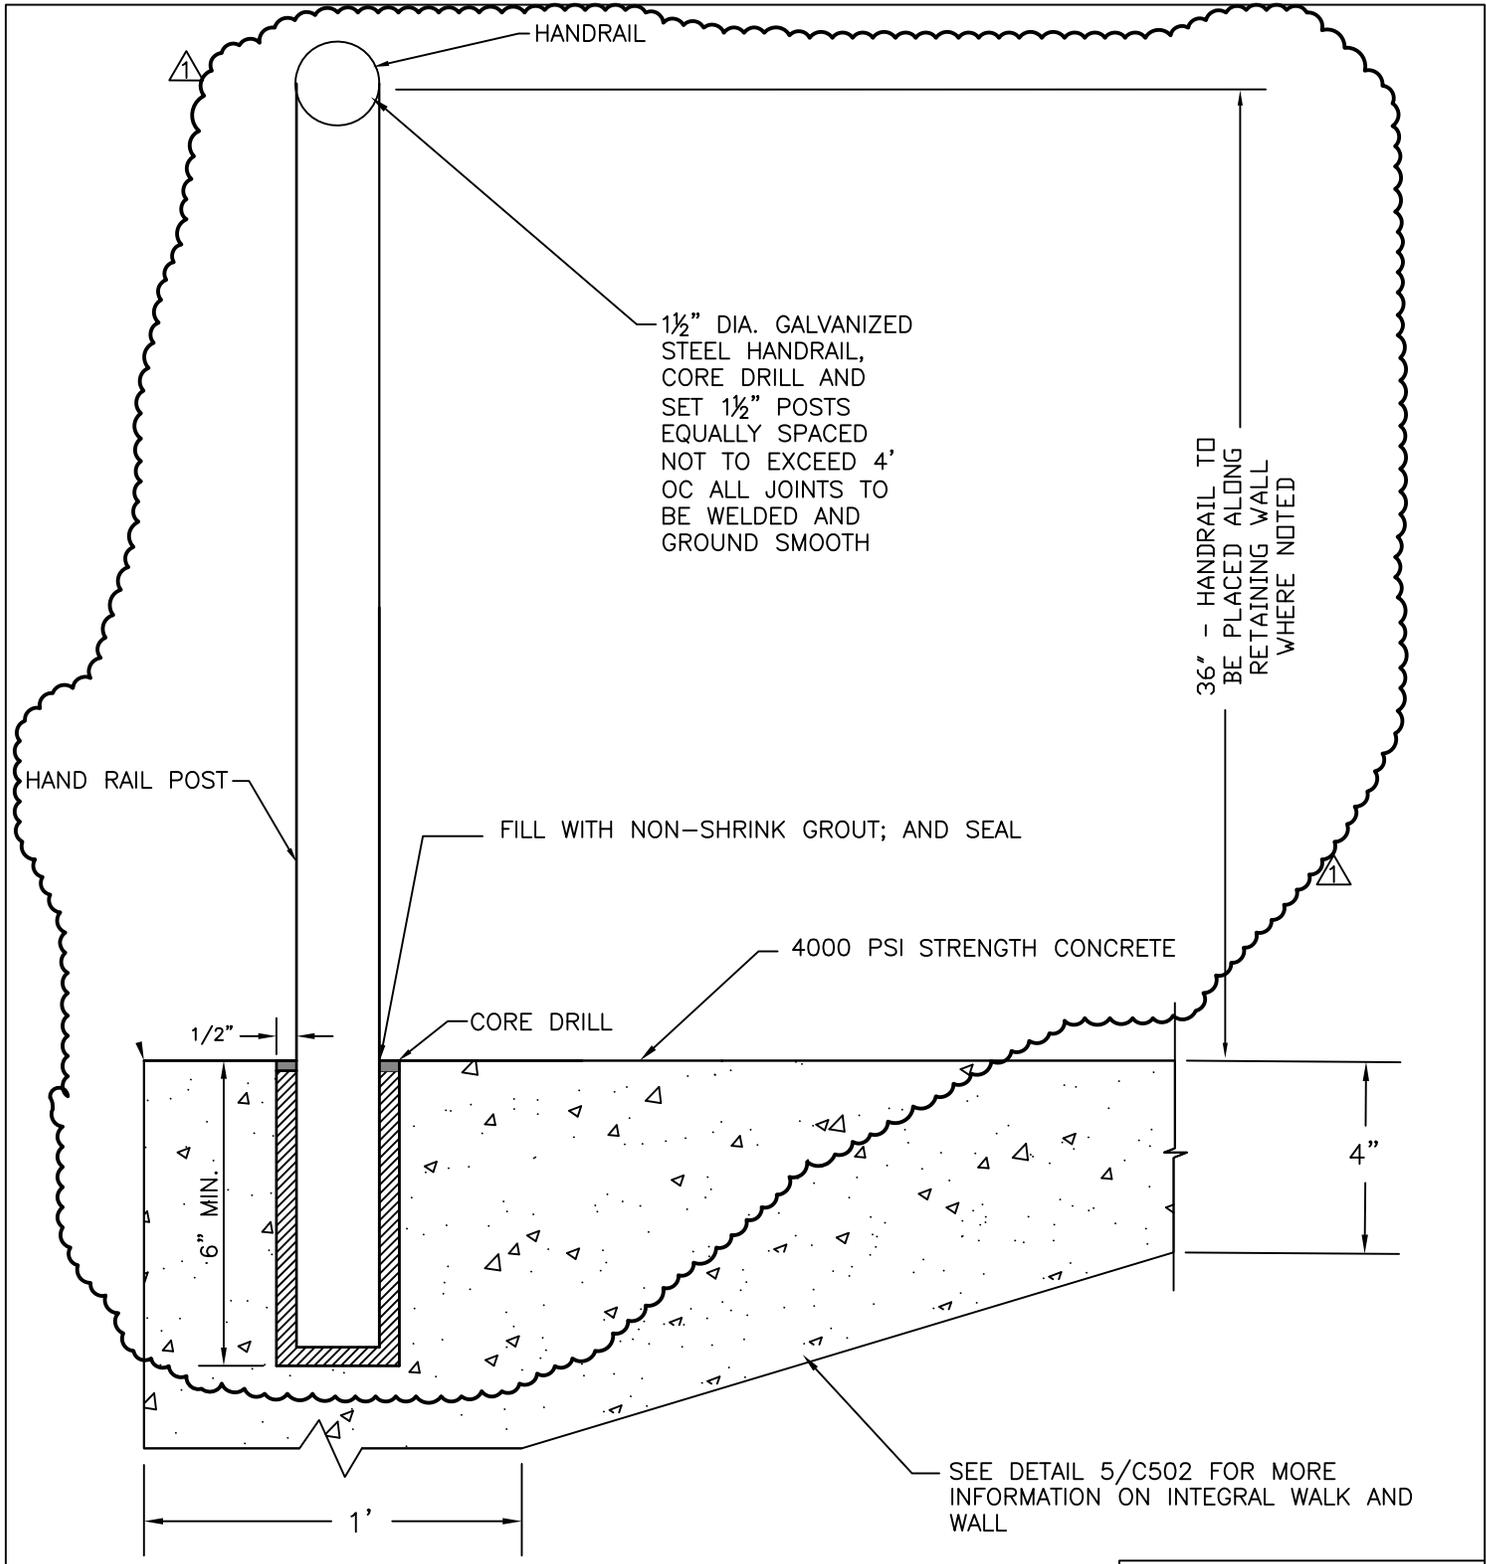

6
C502

CONCRETE WALL HANDRAIL POST DETAIL

△ ALTERNATE NO. 1 AS PART OF ADDENDUM NO. 1

Bledsoe Riggert Guerrettaz
LAND SURVEYING · CIVIL ENGINEERING
1351 West Tapp Road
Bloomington, Indiana 47403
p: 812-336-8277
f: 812-336-0817

KINSER PIKE SIDEWALK IMPROVEMENTS
AT STATE ROAD 45/46 BYPASS

- Addendum
- ESI
- PR
- RFI Response

Project No.:
6612
Date:
10-05-09
Drawing No.:
ADD1-C2

PW 09-23 Kinser Pike Sidewalk (Gourley Pike to SR 45/46)

**Supplemental Unit Prices
For
Additions/Deductions**

<u>Item #</u>	<u>Description</u>	<u>Price Each</u>	<u>Unit</u>
1	Topsoil	_____	TON
2	Casting, Adjust to grade	_____	EA
3	Common Excavation	_____	EA
4	Curb, Concrete – 20” Battered Curb	_____	EA
5	Sidewalk, Concrete 4” Thick	_____	EA
6	Sidewalk, Ramp – Type “G”	_____	EA
7	Sidewalk, Ramp – Type “H”	_____	EA
8	Driveway, Class III	_____	SY
9	Pavement Repair (city specification)	_____	SY
10	Mulched Seeding	_____	SY
11	Sodding	_____	SY
12	Handrail (as depicted in Addendum 1)	_____	LF
13	Trees, Northern Red Oak, 2"-3" Cal.	_____	SY
14	Trees, 12’ Tall Pine	_____	SY
15	12” N-12 Pipe	_____	EA
16	15” N-12 Pipe	_____	EA
17	18” N-12 Pipe	_____	LF
18	24” N-12 Pipe	_____	LF
19	15” RCPA	_____	LF
20	12 inch rip-rap	_____	LF
21	Type C manhole with Casting	_____	LF
22	Storm Inlet Type C with Casting	_____	TON
23	Storm Inlet Type E with Casting	_____	EA
24	Storm Inlet Type J with Casting	_____	EA

- All prices shall reflect complete installation as shown on the plans or stated in the specifications. (Example: Sidewalk includes stone bedding, excavation, Asphalt Pathway includes stone, base, surface and backfill, excavation, etc.)